



## PCSS 5 mm 900 g/m<sup>2</sup> PLASKOLITE Multiwall Polycarbonate Sheets

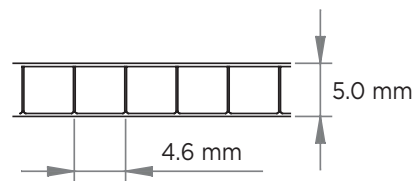

Specially manufactured with a clear tint appearance, provides excellent thermal insulation, highly flexible, yet virtually unbreakable, rigid sheet structure provides extra strength under wind and snow loads.

- Excellent Insulation
- Controlled Daylight Transmission
- Virtually Unbreakable
- Flame Retardant
- Flexible and Easy to Install
- Lightweight
- UV Blocking Layer
- Environmentally Friendly

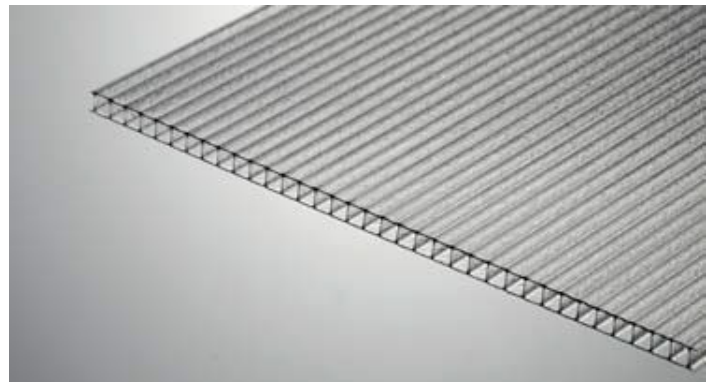

### Technical Specifications

Thickness (mm)	Weight (g/m <sup>2</sup> )	Standard width (mm)	Standard length (mm)	Min. radius for cold bending (mm)	U-Factor (by ASTM C177)	Light Transmission (%) (by ASTM D1003)
5	900	2100	-	875	3.5	80 (clear)

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

## PLASKOLITE

400 W Nationwide Blvd, Suite 400  
Columbus, OH 43215  
800.848.9124 • Fax: 877.538.0754  
plaskolite@plaskolite.com  
www.plaskolite.com